


**GAINÉ CIRCULAIRE DOUBLE SUSPENSION PAR CÂBLE A 120 °**

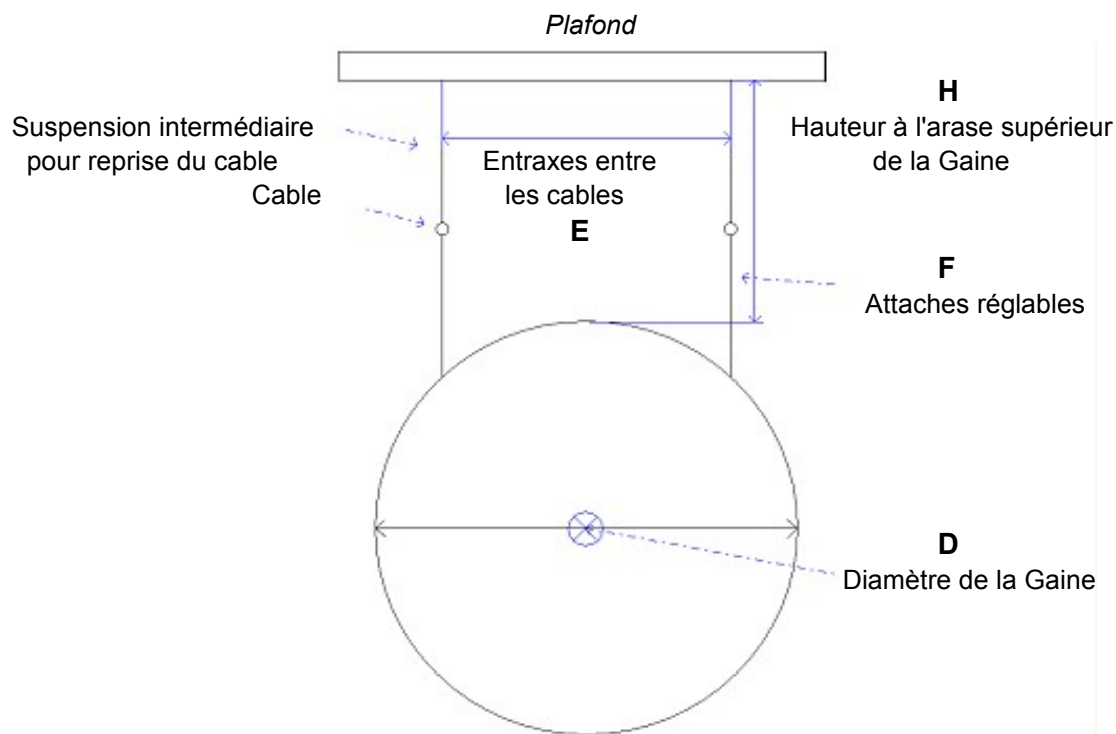

DIAMETRE DES GAINES <b>D</b> MM	ENTRAXE <b>E</b> MM	ATTACHES REGLABLES <b>F</b> MM		<b>H</b>
250	220	80	160	
315	280	100	180	
355	310	120	200	
400	350	140	220	
450	400	160	240	A
500	430	160	240	DEFINIR
560	490	180	270	PAR
630	560	200	290	LE
710	620	220	330	MONTEUR
800	690	240	360	
900	780	280	400	
1000	870	300	420	
1120	980	320	450	
1250	1080	340	480	
1400	1220	360	500	
1500	1300	380	530	
1600	1390	440	600	