


## GAINE CIRCULAIRE SUSPENSION PAR ROULETTE

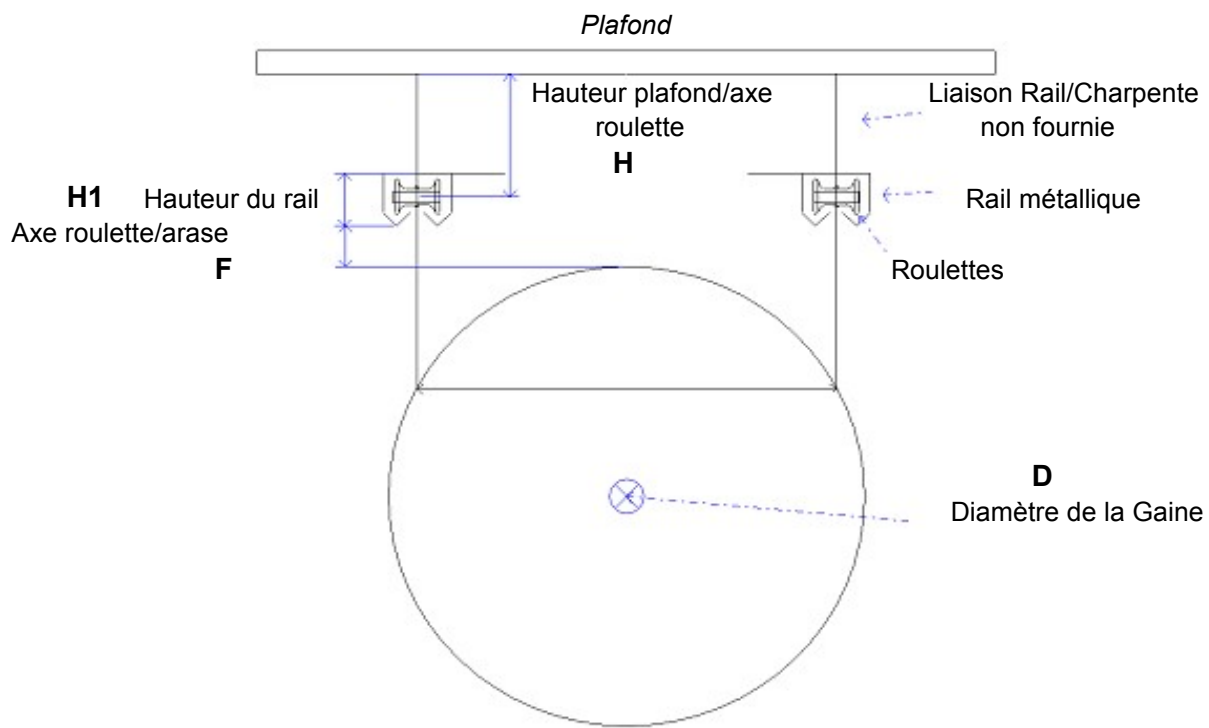

| DIAMETRE DES GAINES |           |             |              |          |
|---------------------|-----------|-------------|--------------|----------|
| <b>D</b>            | <b>MM</b> | <b>F MM</b> | <b>H1 MM</b> | <b>H</b> |
| 250                 |           | 40          | 65           |          |
| 315                 |           | 40          | 65           |          |
| 355                 |           | 40          | 65           |          |
| 400                 |           | 40          | 65           |          |
| 450                 |           | 40          | 65           | A        |
| 500                 |           | 40          | 65           |          |
| 560                 |           | 40          | 65           | DEFINIR  |
| 630                 |           | 40          | 65           |          |
| 710                 |           | 40          | 65           | PAR      |
| 800                 |           | 40          | 65           |          |
| 900                 |           | 40          | 65           | LE       |
| 1000                |           | 40          | 65           |          |
| 1120                |           | 40          | 65           | MONTEUR  |
| 1250                |           | 40          | 65           |          |
| 1400                |           | 40          | 65           |          |
| 1500                |           | 40          | 65           |          |
| 1600                |           | 40          | 65           |          |